the day of the control of the contro

FIG. 1 (PRIOR ART)


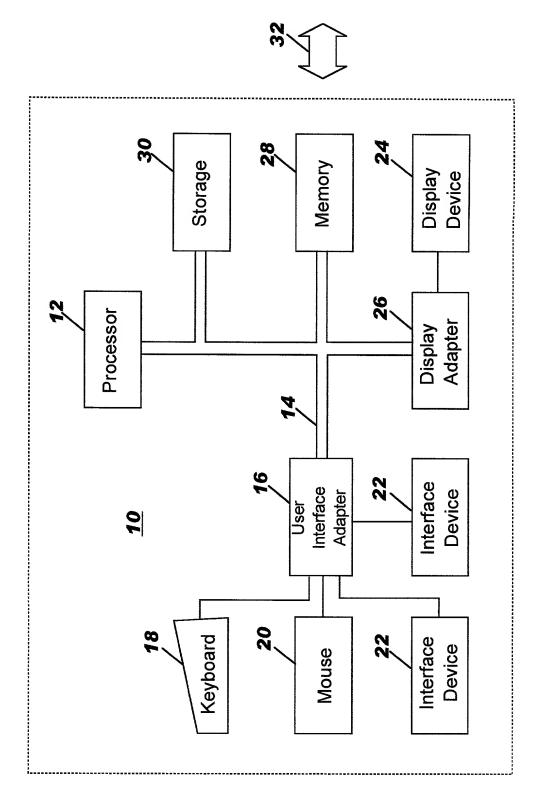


FIG. 2 (PRIOR ART)

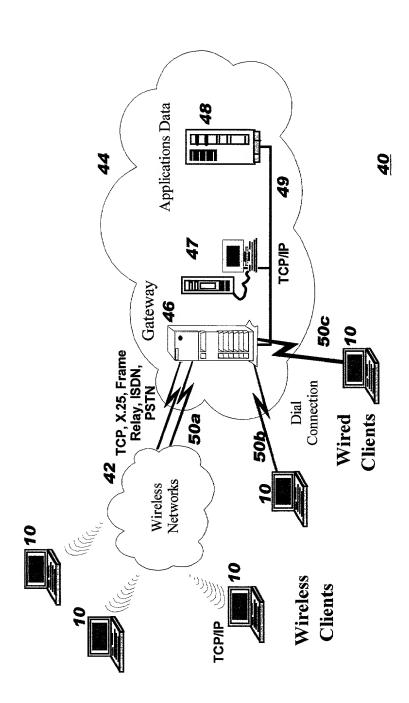



300

310	<pre>IF (Linux_machine) AND (CPU_type = W OR X) IF (AIX_machine) AND (CPU_type = Q)</pre>
	IF (Windows_machine) AND (CPU_speed > N) THEN (Preferred_Topology)
320	IF (AIX_machine) AND (CPU_type = X OR Y) IF (Solaris_machine) AND (CPU_type = Z)
	THEN (Alternative_1_Topology)
330	IF THEN (Alternative_2_Topology)

400

More... XXX.XXX.XXX XXX.XXX.XXX XXX.XXX.XXX More... More... Done Preferred\_Topology (for IBM WebSphere® Application Server) (for WebSphere® and DB2® clients) Enter IP address of Windows® client(s): Enter IP address of Linux® server(s): (for IBM DB2® database server) Enter IP address of AIX® server(s):

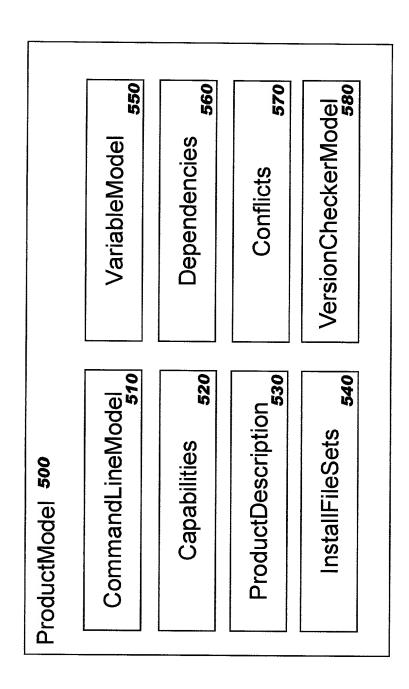

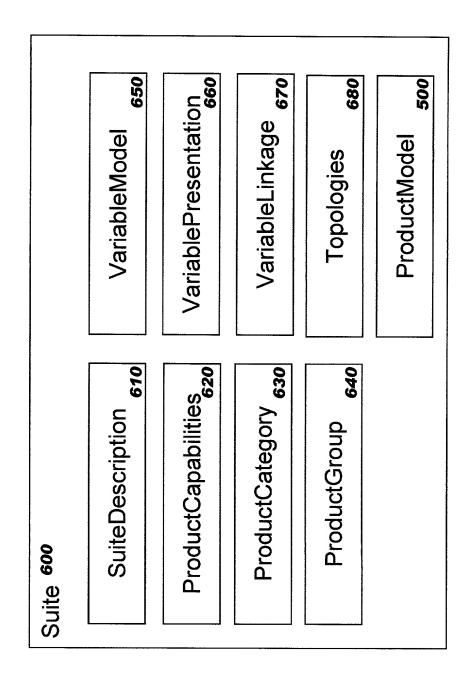

{"product\_vendor", "IBM"},

{"product\_name", "DB2 Universal Database Run-Time Client"},

{"product\_description", "<a href="httml">">httml</a> Provide the following information and click

<b><b>Finish</b> to proceed.<br/><br/>br>Click a field name for additional information about the

field.</html>"},


{"product\_icon", "com/ibm/cbf/icons/db2.gif"},


["files\_DB2RTClient71Win\_prompt\_string", "Specify the location of the install image for this product (for example, the CD-ROM drive or mount point)"},


["jar\_name", "CBN\_db2rtclientwin"],

["var\_DB2\_Runtime\_Client\_prod\_path\_minimum\_length", "3"},
["var\_DB2\_Runtime\_Client\_prod\_path\_mnemonic", "D"},
["var\_DB2\_Runtime\_Client\_prod\_path\_help\_text", "The directory where you want to install ("var\_DB2\_Runtime\_Client\_prod\_path\_label\_text", "Destination Directory"), ("value\_DB2\_Runtime\_Client\_prod\_path\_keyword", "FILE"}, ("value\_DB2\_Runtime\_Client\_prod\_path", "C:\\SQLLIB"}, "value\_DB2\_Runtime\_Client\_prod\_path\_section", " "}, the application files."},

FIG. 9

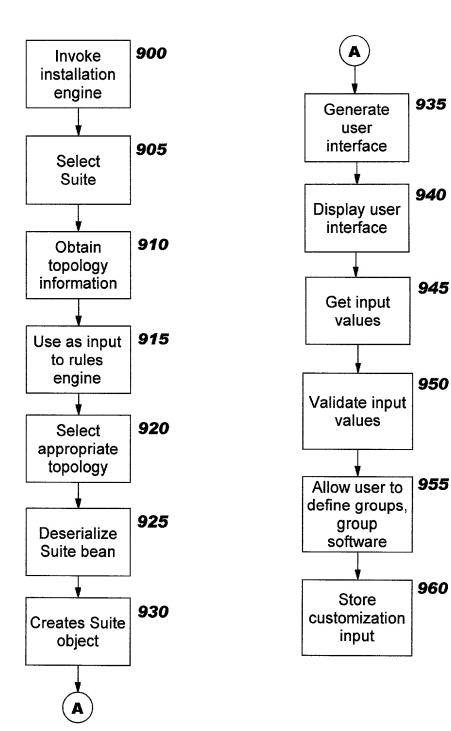

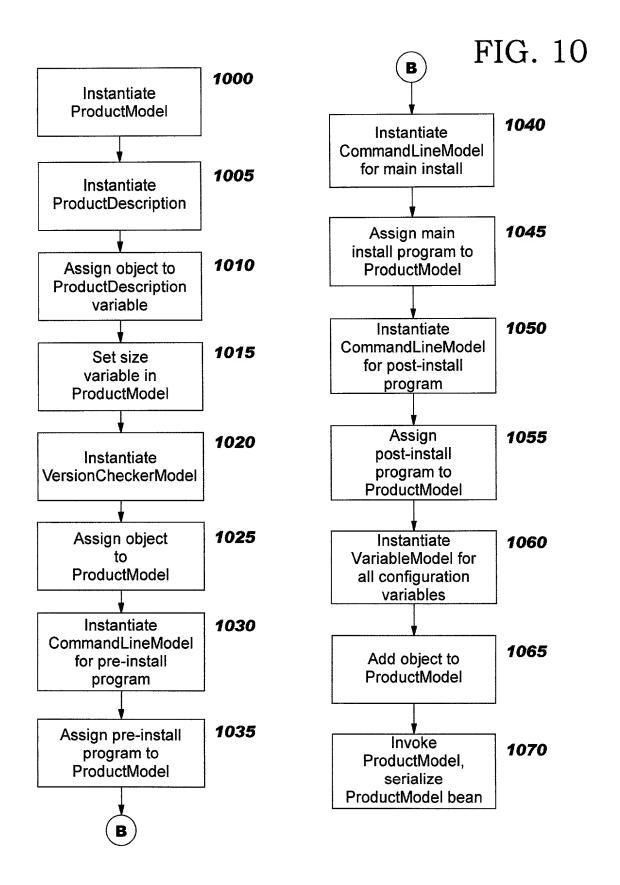

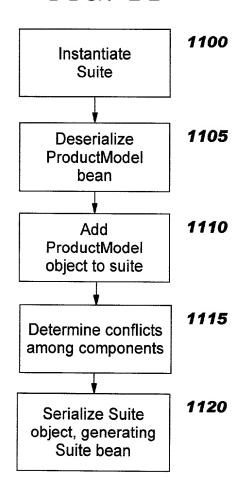

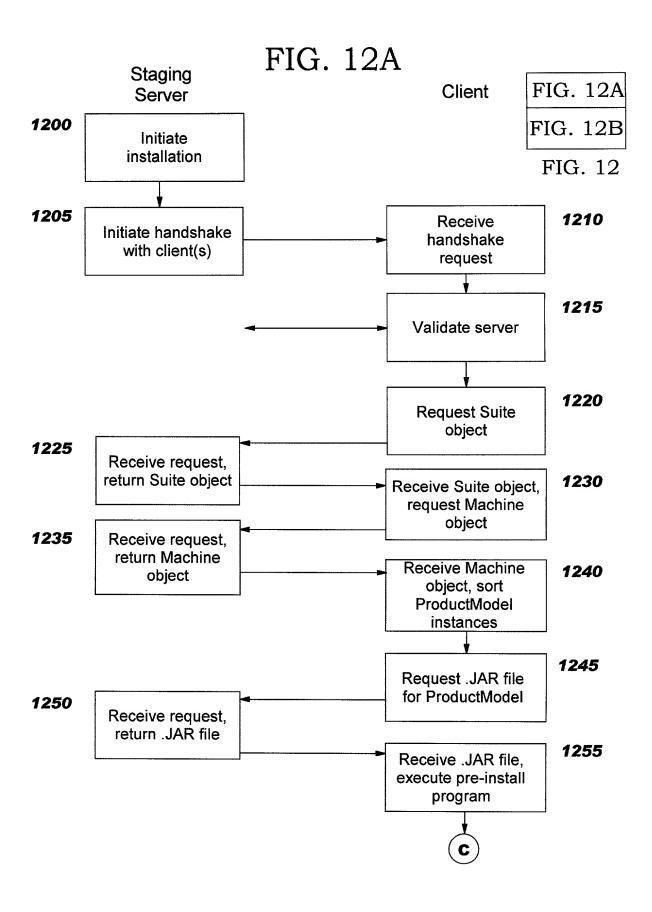


FIG. 12B

